




## ZX80W FULLY RUGGED TABLET

- Qualcomm® QCS6490 octa-core processor with Windows 11 IoT Enterprise LTSC
- Lightweight design with high-capacity hot-swappable batteries for extended, uninterrupted field operation
- 8" LumiBond display with Getac sunlight readable technology (1,000 nits) and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP67 certified
- Multiple configurations with enterprise-level management tools in a thin, light form factor

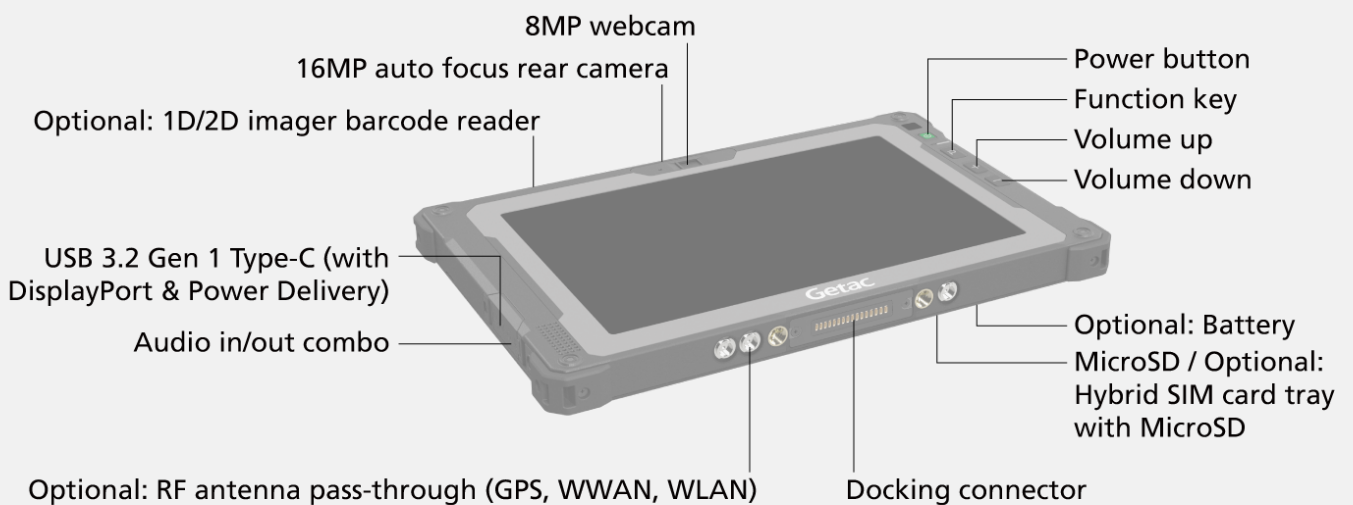

# SPECIFICATIONS

## Operating System

Windows 11 IoT Enterprise LTSC

## Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz  
Max. 2.7GHz

## Graphics

Qualcomm® Adreno™ 643 GPU

## NPU

Qualcomm® Hexagon™ Processor,  
up to 13 TOPS with 6th Qualcomm AI Engine

## Display

8" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)  
Protection film  
1,000 nits LumiBond display with Getac sunlight readable  
technology  
Capacitive multi-touch screen

## Storage & Memory

12GB LPDDR5, 256GB UFS

## Keyboard

Power button  
3 tablet programmable buttons  
Default: Windows Key, Volume up, Volume down

## Pointing Device

Touchscreen  
- Capacitive multi-touch screen  
- Optional: Dual mode touchscreen  
(multi-touch and digitizer)

## Audio

Integrated speakers  
Integrated dual-array microphone

## Expansion Slot

Optional: 1D/2D imager barcode reader

## I/O Interface

8MP webcam x 1  
16MP auto focus rear camera x 1  
Audio in/out combo x 1  
USB 3.2 Gen 1 Type-C (with DisplayPort & Power Delivery) x 1  
MicroSD x 1 or Optional: Hybrid SIM card (Nano-SIM, 4FF)  
tray with MicroSD x 1<sup>i</sup>  
Docking connector x 1  
Optional: SIM card slot x 1 (Nano-SIM, 4FF)<sup>ix</sup>  
Optional: RF antenna pass-through for GPS,  
WWAN and WLAN

## Communication Interface

Wi-Fi 6E 802.11ax  
Bluetooth (v5.2)<sup>ii</sup>  
Dedicated L1/L5 GPS<sup>iii</sup>  
Optional: 4G LTE mobile broadband<sup>i</sup>  
Optional: 5G Sub-6<sup>i</sup>  
Optional: Dual SIM (Nano-SIM 4FF and e-SIM)<sup>i,ix</sup>

## Security Feature

fTPM (Qualcomm TrustZone)

## Power

Internal battery (3.86V, typical 4060mAh; min. 3950mAh)  
LifeSupport battery swappable technology

## Swappable Battery Options:

Battery bay cover (Default)  
Battery (3.84V, typical 4990mAh; min. 4870mAh)  
High capacity Li-ion battery  
(3.84V, typical 9980mAh; min. 9470mAh)

## Dimension (W x D x H) & Weight

234 x 149.8 x 17.6mm (9.21" x 5.89" x 0.69")  
590g (1.3lbs)<sup>iv</sup>

## Rugged Feature

MIL-STD-810H certified  
IP67 certified  
Vibration & 6ft (1.8m) drop resistant<sup>v</sup>  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213  
(Class I, Division 2, Groups A, B, C, D)<sup>vi</sup>

## Environmental Specification

Temperature<sup>vii</sup>:  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

## Pre-installed Software

Getac Utility  
Getac KeyWedge Barcode Reader Utility (trail version)

## Optional software

Getac KeyWedge Barcode Reader Utility  
Getac Monitoring

## Accessories

### Optional:

Carry bag  
Battery (3.84V, typical 4990mAh; min. 4870mAh)  
High capacity Li-ion battery  
(3.84V, typical 9980mAh; min. 9470mAh)  
DC-DC vehicle adapter (65W, 12-32VDC)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
Digitizer pen with tether  
Capacitive stylus with tether  
Protection film  
Hand strap with stylus holder  
Rotating hand strap with kickstand  
Shoulder strap (2-point)  
Vehicle cradle<sup>viii</sup>  
Office dock  
65W USB-C AC Adapter

### Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

3 years Bumper-to-Bumper

# ZX80W FULLY RUGGED TABLET

- I. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Support GPS, GLONASS, Galileo and BeiDou.
- IV. Weight and dimensions vary from configurations and optional accessories.
- V. Drop test results vary from configurations and optional accessories.
- VI. Available with limited configurations and environment conditions.
- VII. Tested by an independent third-party test lab following MIL-STD-810H.
- VIII. Gamber-Johnson vehicle dock and cradle are e-mark certified.
- IX. Units with 4G/5G option come with an embedded SIM card slot.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

|                      | Vehicle Dock        | Office Dock                           |
|----------------------|---------------------|---------------------------------------|
| Serial Port          | 1                   | -                                     |
| Audio In/Out Combo   | -                   | 1                                     |
| DC in Jack           | 1                   | -                                     |
| USB                  | USB 2.0 x 2         | USB 2.0 x 2, USB Type-C (PD only) x 1 |
| LAN                  | 1                   | 1                                     |
| HDMI                 | -                   | 1                                     |
| RF Antenna Connector | 3 (WWAN, WLAN, GPS) | -                                     |
| Kensington Lock      | -                   | 1                                     |

# Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1,  
Nangang Rd., Nangang Dist., Taipei City,  
115018, Taiwan, R.O.C. Tel : +886 2 2785  
7888 globalmarketing@getac.com |  
www.getac.com

Copyright © 2026 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only, available specification shall be subjected to  
quotation by request.